

# CG series

- 125°C 1000 hours~3000 hours.
- Applicable to SMT process.
- RoHS Compliance.
- 125°C 1000小時~3000小時 長壽命產品。
- 適用於SMT製程。



## SPECIFICATIONS

Items 項目	Characteristics 特性														
Capacitance Tolerance 靜電容量誤差	$\pm 20\%$ (120Hz,20°C)														
Operating Temperature Range 適用溫度範圍	-55 ~ +125°C					-40 ~ +125°C									
Rated Voltage Range 額定電壓範圍	10 ~ 63VDC					80 ~ 160VDC									
Capacitance Range 靜電容量範圍	10 ~ 470μF					2.2 ~ 33μF									
Leakage Current 洩漏電流	$I \leq 0.01CV$ or $3(\mu A)$ , which is greater. ( After 2 minutes application of DC rated voltage, at 20°C)														
Dissipation Factor 散逸因素( $\tan \delta$ )	Measurement Frequency: 120Hz. Temperature: 20°C														
	Rated Voltage(V)	10	16	25	35	50	63	80	100	160					
	$\tan \delta$ (Max)	0.32	0.24	0.21	0.18	0.18	0.15	0.15	0.12	0.20					
Low Temperature Stability 低溫特性	Measurement Frequency: 120Hz.														
Impedance Ratio(Max) 阻抗比率(最大值)	Rated Voltage(V)	10	16	25	35	50	63	80	100	160					
	$Z(-25^\circ C)/Z(20^\circ C)$	3	2	2	2	2	2	2	2	-					
	$Z(-40^\circ C)/Z(20^\circ C)$	-	-	-	-	-	-	3	3	-					
	$Z(-55^\circ C)/Z(20^\circ C)$	6	4	4	3	3	3	-	-	-					
Load Life 負荷壽命	3000hours,with application of rated voltage at 125°C ( $\emptyset D=4\sim6.3\times5.4mm$ : 1000hrs; $6.3\times7.7mm$ : 2000hrs)														
	Capacitance Change	Within $\pm 30\%$ of Initial Value													
	$\tan \delta$	300% or less of Initial Specified Value													
	Leakage Current	Initial Specified Value or less													
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.														
	Capacitance Change	Within $\pm 30\%$ of Initial Value													
	$\tan \delta$	300% or less of Initial Specified Value													
	Leakage Current	500% or less of Initial Specified Value													
Resistance to Soldering Heat 焊錫耐熱性	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature they meet the characteristics requirements listed at right.	Capacitance Change			Within $\pm 10\%$ of Initial Value										
		$\tan \delta$			Initial Specified Value										
		Leakage Current			Initial Specified Value or less										
Standards 參照標準	IEC 60384-4 (JIS C 5101-4)														

### Frequency Coefficient of Permissible Ripple Current


Frequency (Hz)	50	60	120	1K	$\geq 10K$
Coefficient	0.64	0.64	1.00	1.36	1.50

CG

# CG series

**DIMENSIONS(mm)**

## ■ Chip Type

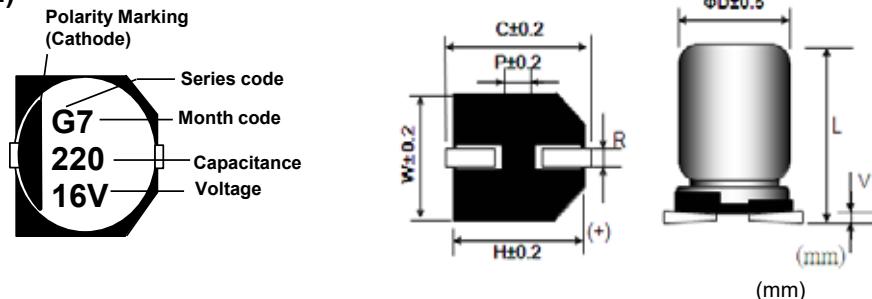

Size	ΦD	L	W	H	C	R	P	V <sub>max</sub>
6.3x5.4	6.3	5.4±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
6.3x7.7	6.3	7.7±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
8x10	8.0	10±0.5	8.3	8.3	9.0	0.7~1.1	3.2	0.3
10x10	10.0	10±0.5	10.3	10.3	11.0	0.7~1.3	4.5	0.3

**STANDARD RATINGS**

D×L(mm); R.C.(mA rms) at 125°C 120Hz.

Cap (μF)	V	10		16		25		35		50		
		Item	D x L	R.C.	D x L	R.C.	D x L	R.C.	D x L	R.C.	D x L	R.C.
10									6.3x5.4	46	6.3x7.7	34
22									6.3x5.4	46	6.3x7.7	55
33						6.3x5.4	46	6.3x7.7	73	8x10	106	
47				6.3x5.4	40	6.3x7.7	73	6.3x7.7	73	8x10	106	
										10x10	164	
100	6.3x7.7	58	6.3x7.7	73	6.3x7.7	73	8x10	131			10x10	164
							8x10	131	10x10	164		
220	6.3x7.7	58	8x10	131	8x10	131			10x10	164		
			10x10	164	10x10	164						
330		8x10	90									
		10x10	112	10x10	164	10x10	164					
470		10x10	130									

Cap (μF)	V	63		80		100		160		
		Item	D x L	R.C.						
2.2									8x10	22
3.3									8x10	22
4.7									10x10	70
10	6.3x7.7	40	8x10	46	8x10	46				
22	8x10	66	8x10	46	8x10	46				
			10x10	76	10x10	76				
33	8x10	66	8x10	46			10x10	76		
	10x10	113	10x10	76						
47	8x10	66								
	10x10	113								