

SPB series

- Low ESR.
- High Voltage, Long Life.
- 125°C, 2,000 to 4,000hrs.
- RoHS compliant
- For automotive mouldes and other high temperature applications



SPB


SPECIFICATIONS

Items	Conditions	Characteristics	
Category Temperature Range	—	-55 to +125°C	
Rated Voltage Range	—	16 ~ 50V	
Capacitance Tolerance	at 20°C, 120HZ	±20%(M)	
Surge Voltage	at 15~35°C	Rated voltage ×1.15V	
Leakage Current	at 20°C after 2 minutes	I ≤ 0.01CV or 3(μA) Whichever is greater measured after 2 minutes application of rated working voltage at +20°C. Please see the attached characteristics list	
Dissipation Factor (tan δ)	at 20°C, 120Hz	Please see the attached characteristics list	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 to 4,000 hours at 125°C. Φ6.3=2,000hrs, D ≥ Φ8=4,000hrs	Appearance	No significant damage.
		Capacitance change	±30% of the initial value.
		DF(tanδ)	≤200% of the initial specified value.
		ESR	≤200% of the initial specified value.
		Leakage current	≤The initial specified value.
Damp Heat (Steady State)	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to subjecting them to store at 60°C, 90 to 95% RH for 1,000 hours, without DC applied.	Appearance	No significant damage.
		Capacitance change	±30% of the initial value.
		DF(tanδ)	≤200% of the initial specified value.
		ESR	≤200% of the initial specified value.
		Leakage current	≤The initial specified value.
Surge Voltage	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltages specified at 15~35°C for 30 seconds through a protective resistor (R=1kΩ) and discharge for 5 minutes 30 seconds	Appearance	No significant damage.
		Capacitance change	±30% of the initial value.
		DF(tanδ)	≤200% of the initial specified value.
		ESR	≤200% of the initial specified value.
		Leakage current	≤The initial specified value.
Standards	IEC 60384-4 (JIS C 5101-4)		

※ Note: If any doubt arises, measure the leakage current after following voltage treatment.

Voltage treatment : DC rated voltage are applied to the capacitors for 120 minutes at 125°C.

MARKING AND DIMENSIONS

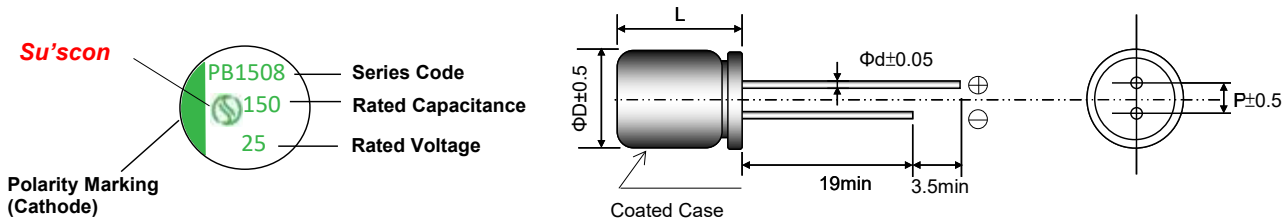

(Unit:mm)

Size Code	6.3x7.2	8x9.5	10x9.5	10x11.5
ΦD	6.3	8.0	10.0	10.0
L	L+1.5max	L+1.5max	L+1.5max	L+1.5max
Φd	0.5	0.6	0.6	0.6
P	2.5	3.5	5.0	5.0

SPB series

SPB

STANDARD RATINGS

Rated voltage (S.V.)	Cap (μF)	Size Code DxL	Leakage current (μA) max.	ESR (mΩ) max. 100k to 300kHz / 20°C	Rated Ripple Current (mA rms) 100kHz / 125°C	D.F. (tanδ) max. 120Hz / 20°C
16 (18.4)	120	6.3×7.2	19	40	1100	0.16
	270	8×9.5	43	26	1500	0.16
	470	10×9.5	75	21	2000	0.16
	560	10×11.5	90	15	2300	0.16
25 (28.8)	68	6.3×7.2	17	45	1000	0.16
	150	8×9.5	38	27	1300	0.16
	270	10×9.5	68	22	1500	0.16
	330	10×11.5	83	16	1700	0.16
35 (40.3)	47	6.3×7.2	16	60	900	0.16
	100	8×9.5	35	30	1200	0.16
	150	10×9.5	53	23	1400	0.16
	220	10×11.5	77	17	1600	0.16
40 (46.0)	27	6.3×7.2	11	70	900	0.16
	56	8×9.5	22	32	1200	0.16
	100	10×9.5	40	24	1400	0.16
	120	10×11.5	48	18	1600	0.16
50 (57.5)	15	6.3×7.2	8	80	800	0.16
	33	8×9.5	17	35	1100	0.16
	56	10×9.5	28	25	1300	0.16
	82	10×11.5	41	19	1500	0.16

Frequency Coefficient of Permissible Ripple Current

Capacitance (μF)	Frequency (Hz)			
	100 ≤ F < 1K	1K ≤ F < 10K	10K ≤ F < 100K	100K ≤ F
4.7 < C ≤ 33	0.05	0.32	0.67	1.00
33 < C	0.10	0.35	0.70	1.00