

# SVB series

- Low ESR.
- High Voltage, Long Life.
- 125°C, 2,000 to 4,000hrs.
- RoHS compliant
- For automotive moudles and other high temperature applications





## SPECIFICATIONS

| Items                        | Conditions   | Characteristics  |  |
|------------------------------|--|--|--|
| Category Temperature Range   | —  | -55 to +125°C  |  |
| Rated Voltage Range          | —  | 16 ~ 125V  |  |
| Capacitance Tolerance        | at 20°C, 120Hz   | $\pm 20\%$ (M)   |  |
| Surge Voltage                | at 15~35°C   | Rated voltage $\times 1.15V$   |  |
| Leakage Current              | at 20°C after 2 minutes  | I $\leq 0.01CV$ or 3(uA) Whichever is greater measured, after 2minutes application of rated working voltage at +20°C. Please see the attached characteristics list |  |
| Dissipation Factor ( tan δ ) | at 20°C, 120Hz   | Please see the attached characteristics list   |  |
| Endurance                    | The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 to 4,000 hours at 125°C.<br>$\Phi 6.3=2,000\text{hrs}$ , $D \geq \Phi 8=4,000\text{hrs}$ | Appearance   | No significant damage.                       |
|                              |  | Capacitance change   | $\leq \pm 30\%$ of the initial value.        |
|                              |  | DF(tanδ)   | $\leq 200\%$ of the initial specified value. |
|                              |  | ESR  | $\leq 200\%$ of the initial specified value. |
|                              |  | Leakage current  | $\leq$ The initial specified value.          |
| Damp Heag (Steady State)     | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to subjecting them to store at 60°C, 90 to 95% RH for 1,000 hours ,without DC applied.                          | Appearance   | No significant damage.                       |
|                              |  | Capacitance change   | $\leq \pm 30\%$ of the initial value.        |
|                              |  | DF(tanδ)   | $\leq 200\%$ of the initial specified value. |
|                              |  | ESR  | $\leq 200\%$ of the initial specified value. |
|                              |  | Leakage current  | $\leq$ The initial specified value.          |
| Surge Voltage                | The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltages specified at 15~35°C for 30 seconds through a protective resistor ( $R=1k\Omega$ ) and discharge for 5 minutes 30seconds   | Appearance   | No significant damage.                       |
|                              |  | Capacitance change   | $\leq \pm 30\%$ of the initial value.        |
|                              |  | DF(tanδ)   | $\leq 200\%$ of the initial specified value. |
|                              |  | ESR  | $\leq 200\%$ of the initial specified value. |
|                              |  | Leakage current  | $\leq$ The initial specified value.          |
| Standards                    | IEC 60384-4 (JIS C 5101-4)   |  |  |

※ Note: If any doubt arises, measure the leakage current after following voltage treatment.

Voltage treatment : DC rated voltage are applied to the capacitors for 120 minutes at 125°C.

## MARKING AND DIMENSIONS

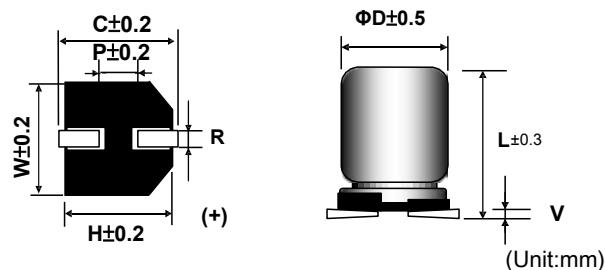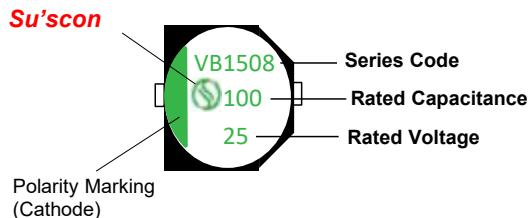

| Size    | ΦD   | L    | W    | H    | C    | R       | P   | V max |
|---------|------|------|------|------|------|---------|-----|-------|
| 6.3×6.0 | 6.3  | 6.0  | 6.6  | 6.6  | 7.3  | 0.5~0.8 | 2.1 | 0.3   |
| 6.3×7.7 | 6.3  | 7.7  | 6.6  | 6.6  | 7.3  | 0.5~0.8 | 2.1 | 0.3   |
| 8×10.5  | 8.0  | 10.5 | 8.3  | 8.3  | 9.0  | 0.7~1.1 | 3.2 | 0.3   |
| 10×10.5 | 10.0 | 10.5 | 10.3 | 10.3 | 11.0 | 0.7~1.3 | 4.5 | 0.3   |
| 10×12.5 | 10.0 | 12.5 | 10.3 | 10.3 | 11.0 | 0.7~1.3 | 4.5 | 0.3   |

# SVB series

## STANDARD RATINGS

| Rated voltage (S.V.) | Cap (μF) | Size Code DxL | Leakage current (μA) max. | ESR (mΩ) max. 100k to 300kHz / 20°C | Rated Ripple Current (mA rms) 100kHz / 125°C | D.F. (tanδ) max. 120Hz / 20°C |
|----------------------|----------|---------------|---------------------------|-------------------------------------|--|-------------------------------|
| 16<br>(18.4)         | 82       | 6.3x6.0       | 13                        | 55                                  | 970  | 0.16                          |
|                      | 120      | 6.3x7.7       | 19                        | 40                                  | 1100   | 0.16                          |
|                      | 270      | 8x10.5        | 43                        | 26                                  | 1500   | 0.16                          |
|                      | 470      | 10x10.5       | 75                        | 21                                  | 2000   | 0.16                          |
|                      | 560      | 10x12.5       | 90                        | 15                                  | 2300   | 0.16                          |
| 25<br>(28.8)         | 47       | 6.3x6.0       | 12                        | 60                                  | 890  | 0.16                          |
|                      | 68       | 6.3x7.7       | 17                        | 45                                  | 1100   | 0.16                          |
|                      | 150      | 8x10.5        | 38                        | 27                                  | 1300   | 0.16                          |
|                      | 270      | 10x10.5       | 68                        | 22                                  | 1500   | 0.16                          |
|                      | 330      | 10x12.5       | 83                        | 16                                  | 1700   | 0.16                          |
| 35<br>(40.3)         | 27       | 6.3x6.0       | 9                         | 100                                 | 760  | 0.16                          |
|                      | 47       | 6.3x7.7       | 16                        | 60                                  | 900  | 0.16                          |
|                      | 100      | 8x10.5        | 35                        | 30                                  | 1200   | 0.16                          |
|                      | 150      | 10x10.5       | 53                        | 23                                  | 1400   | 0.16                          |
|                      | 220      | 10x12.5       | 77                        | 17                                  | 1700   | 0.16                          |
| 40<br>(46.0)         | 18       | 6.3x6.0       | 7                         | 110                                 | 720  | 0.16                          |
|                      | 27       | 6.3x7.7       | 11                        | 70                                  | 900  | 0.16                          |
|                      | 56       | 8x10.5        | 22                        | 32                                  | 1200   | 0.16                          |
|                      | 100      | 10x10.5       | 40                        | 24                                  | 1400   | 0.16                          |
|                      | 120      | 10x12.5       | 48                        | 18                                  | 1600   | 0.16                          |
| 50<br>(57.5)         | 10       | 6.3x6.0       | 5                         | 120                                 | 690  | 0.16                          |
|                      | 15       | 6.3x7.7       | 8                         | 80                                  | 800  | 0.16                          |
|                      | 33       | 8x10.5        | 17                        | 35                                  | 1100   | 0.16                          |
|                      | 47       | 8x10.5        | 24                        | 35                                  | 1100   | 0.16                          |
|                      | 56       | 10x10.5       | 28                        | 25                                  | 1300   | 0.16                          |
|                      | 82       | 10x12.5       | 41                        | 19                                  | 1500   | 0.16                          |
| 63<br>(72.5)         | 6.8      | 6.3x6.0       | 4                         | 150                                 | 670  | 0.16                          |
|                      | 10       | 6.3x7.7       | 6                         | 100                                 | 700  | 0.16                          |
|                      | 22       | 8x10.5        | 14                        | 40                                  | 1000   | 0.16                          |
|                      | 33       | 8x10.5        | 21                        | 40                                  | 1000   | 0.16                          |
|                      |          | 10x10.5       | 21                        | 30                                  | 1200   | 0.16                          |
|                      | 47       | 10x10.5       | 30                        | 30                                  | 1200   | 0.16                          |
|                      | 56       | 10x12.5       | 35                        | 22                                  | 1400   | 0.16                          |
| 80<br>(82.0)         | 12       | 10x10.5       | 10                        | 70                                  | 900  | 0.16                          |
|                      | 15       | 10x10.5       | 12                        | 70                                  | 900  | 0.16                          |
|                      | 18       | 10x12.5       | 14                        | 50                                  | 1100   | 0.16                          |
| 100<br>(115.0)       | 10       | 8x10.5        | 10                        | 80                                  | 800  | 0.16                          |
|                      | 12       | 10x10.5       | 12                        | 80                                  | 800  | 0.16                          |
|                      | 15       | 10x12.5       | 15                        | 60                                  | 1000   | 0.16                          |
| 125<br>(143.8)       | 10       | 10x10.5       | 13                        | 90                                  | 700  | 0.16                          |

## Frequency Coefficient of Permissible Ripple Current

| Capacitance (μF) | Frequency (Hz) | 100 ≤ F < 1K | 1K ≤ F < 10K | 10K ≤ F < 100K | 100K ≤ F |
|------------------|----------------|--------------|--------------|----------------|----------|
| 4.7 < C ≤ 33     |                | 0.05         | 0.32         | 0.67           | 1.00     |
| 33 < C           |                | 0.10         | 0.35         | 0.70           | 1.00     |