

# VC series

- Super low ESR, High ripple current capability
- Rated voltage :2.5~16V.
- Endurance:2,000hours at 105°C
- Applications:motherboards, servers,VGA ,etc.
- ROHS compliant
- Halogen Free compliant




VC

## SPECIFICATIONS

Items	Conditions	Characteristics	
Category Temperature Range	—	-55 to +105°C	
Rated Voltage Range	—	2.5 ~ 16V	
Capacitance Tolerance	at 20°C, 120HZ	±20% ( M )	
Surge Voltage	at 105°C	Rated voltage x1.15V	
Leakage Current	at 20°C after 2 minutes	$I \leq 0.2CV$ or $300(\mu A)$ Whichever is greater measured, after 2 minutes application of rated working voltage at +20°C. Please see the attached characteristics list	
Dissipation Factor ( $\tan \delta$ )	at 20°C, 120Hz	Please see the attached characteristics list	
Low Temperature Characteristics (Max. Impedance Ratio)	at -55°C, 100kHz	$Z(-55^\circ C) / Z(+20^\circ C)$	$\leq 1.25$
	at -25°C, 100kHz	$Z(-25^\circ C) / Z(+20^\circ C)$	$\leq 1.15$
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.	Appearance	No significant damage.
		Capacitance change	$\leq \pm 20\%$ of the initial value.
		DF ( $\tan \delta$ )	$\leq 150\%$ of the initial specified value.
		ESR	$\leq 150\%$ of the initial specified value.
Damp Heat (Steady State)	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to store 60°C, 90 to 95% RH for 1,000 hours, without DC applied.	Appearance	No significant damage.
		Capacitance change	$\leq \pm 20\%$ of the initial value.
		DF ( $\tan \delta$ )	$\leq 150\%$ of the initial specified value.
		ESR	$\leq 150\%$ of the initial specified value.
Surge Voltage	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltages specified at 105°C for 30 seconds through a protective resistor ( R = 1 kΩ ) and discharge for 5 minutes 30 seconds.	Appearance	No significant damage.
		Capacitance change	$\leq \pm 20\%$ of the initial value.
		DF ( $\tan \delta$ )	$\leq 150\%$ of the initial specified value.
		ESR	$\leq 150\%$ of the initial specified value.
		Leakage current	$\leq$ The initial specified value.

※ Note : If any doubt arises, measure the leakage current after following voltage treatment.  
 Voltage treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105°C.

## MARKING AND DIMENSIONS

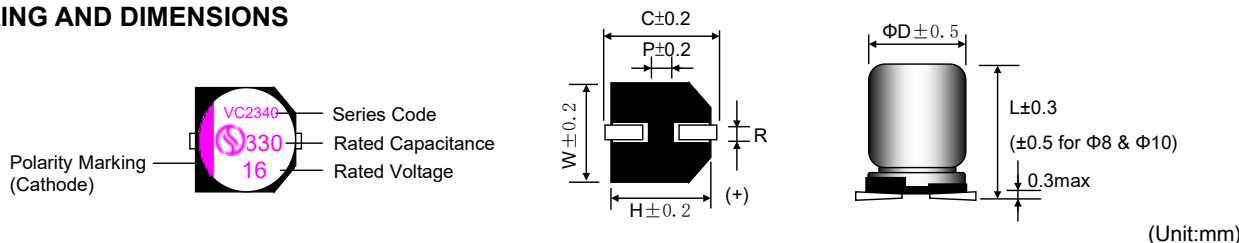

ΦDxL	ΦD	L	W	H	C	R	P
5×5.8	5.0	5.8	5.3	5.3	6.0	0.5~0.8	1.4
6.3×5.8	6.3	5.8	6.6	6.6	7.3	0.6~0.9	2.1
6.3×9.5	6.3	9.5	6.6	6.6	7.3	0.6~0.9	2.1
8×6.7	8.0	6.7	8.3	8.3	9.0	0.8~1.1	3.2
8×9.5	8.0	9.5	8.3	8.3	9.0	0.8~1.1	3.2
8×12	8.0	12.0	8.3	8.3	9.0	0.8~1.1	3.2
10×10.5	10.0	10.5	10.3	10.3	11.0	0.8~1.1	4.6
10×12.5	10.0	12.5	10.3	10.3	11.0	0.8~1.1	4.6

# VC series

## STANDARD RATINGS

Rated Voltage (S.V.)	Cap (μF)	Size Code DxL	Leakage current (μA) max.	ESR (mΩ) max. 100k to 300kHz / 20°C	Rated Ripple Current (mA rms) 100kHz / 105°C	D.F. (tanδ) max. 120Hz / 20°C
2.5 (2.9)	220	5×5.8	300	40	1620	0.12
	330	6.3×5.8	300	20	2690	0.12
	820	6.3×9.5	410	18	3200	0.12
	820	8×9.5	410	18	4520	0.12
	1500	8×9.5	750	18	4520	0.12
	1800	8×12	900	12	5200	0.12
	2700	10×12.5	1350	12	5500	0.12
4 (4.6)	68	5×5.8	300	40	1500	0.12
	150	6.3×5.8	300	24	2200	0.12
	680	6.3×9.5	544	16	3200	0.12
	680	8×6.7	544	20	3400	0.12
	1000	8×9.5	800	16	4500	0.12
	1500	8×12	1200	14	5100	0.12
	1800	10×12.5	1440	12	5500	0.12
	2200	10×12.5	2000	12	5500	0.12
6.3 (7.2)	100	5×5.8	300	40	1500	0.12
	220	5×7	300	20	1600	0.12
	220	6.3×5.8	300	20	2400	0.12
	560	6.3×9.5	705	20	3200	0.12
	560	8×6.7	705	20	3300	0.12
	820	8×9.5	1033	15	4450	0.12
	1000	8×9.5	1260	15	4520	0.12
	1200	8×12	1512	12	5020	0.12
	1500	10×10.5	1890	15	5020	0.12
	1800	10×10.5	2268	12	5400	0.12
	2200	10×12.5	2772	12	5500	0.12
10 (11.5)	68	5×5.8	300	40	1500	0.12
	120	6.3×5.8	300	25	2420	0.12
	150	8×6.7	300	22	2450	0.12
	330	6.3×9.5	660	20	3200	0.12
	560	8×9.5	1120	16	4450	0.12
	680	8×9.5	1360	16	4450	0.12
	820	8×12	1640	14	4850	0.12
	1000	10×10.5	2000	15	5020	0.12
	1200	10×10.5	2400	15	5200	0.12
	1500	10×12.5	3000	14	5400	0.12
16 (18.4)	100	6.3×5.8	320	24	2400	0.12
	180	6.3×9.5	576	20	3200	0.12
	220	6.3×9.5	704	20	3200	0.12
	270	6.3×9.5	864	20	3200	0.12
	270	8×6.7	864	20	3400	0.12
	270	8×9.5	864	20	4400	0.12
	470	8×9.5	1504	20	4400	0.12
	560	8×12	1792	16	4820	0.12
	680	10×10.5	2176	18	5200	0.12
	1000	10×12.5	3200	16	5400	0.12

## FREQUENCY COEFFICIENT FOR RIPPLE CURRENT

Frequency	120Hz ≤ f < 1kHz	1kHz ≤ f < 10kHz	10kHz ≤ f < 100kHz	100kHz ≤ f < 500kHz
Coefficient	0.05	0.3	0.7	1.0

VC