

SX series

- High ripple and Low impedance, long life: 4000~5000hrs at 105°C
- Suited for LCD TV BLU Inverter, SMPS, IP-Board, Adaptor etc..
- 105°C高紋波低阻抗品，壽命：4000~5000Hrs
- 高頻超低阻抗
- 適用背光模組轉換器開關電源，適配器等。



SPECIFICATIONS


Items 項目	Characteristics 特性					
Capacitance Tolerance 靜電容量誤差	± 20%(120Hz, 20°C)					
Operating Temperature Range 適用溫度範圍	-40 ~ +105°C					
Rated Voltage Range 額定電壓範圍	10 ~ 50VDC					
Leakage Current 洩漏電流	$I \leq 0.01CV$ or 3 (µA) which is greater. (After 2 minutes application of DC rated voltage, at 20 °C)					
Dissipation Factor 散逸因素(tan δ)	Measurement Frequency: 120Hz. Temperature: 20°C					
	Rated Voltage(V)	10	16	25	35	50
	tan δ(Max)	0.19	0.16	0.14	0.12	0.10
When nominal capacitance over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.						
Low Temperature Stability 低溫特性 Impedance Ratio(Max) 阻抗比率(最大值)	Measurement Frequency: 120Hz.					
	Rated Voltage(V)	10	16	25	35	50
	Z(-25°C)/Z(20°C)	2	2	2	2	2
	Z(-40°C)/Z(20°C)	3	3	3	3	3
Load Life 負荷壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 5,000 hours (ΦD≤8 & Size:10x12.5 ; 4,000 hours) at 105°C.					
	Capacitance Change	Within ± 30% of Initial Value				
	tan δ	200% or less of Initial Specified Value				
	Leakage Current	Initial Specified Value or less				
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.					
	Capacitance Change	Within ± 25% of Initial Value				
	tan δ	200% or less of Initial Specified Value				
	Leakage Current	Initial Specified Value or less				
Standards 參照標準	IEC 60384-4(JIS C5101-4)					

Frequency Coefficient of Permissible Ripple Current

Capacitance (µF)	Frequency (Hz)			
	120	1K	10K	100K
100 ~ 270	0.40	0.75	0.90	1.00
330 ~ 680	0.50	0.85	0.94	1.00
820 ~ 1800	0.60	0.87	0.95	1.00
2200 ~ 2700	0.75	0.90	0.95	1.00

SX series

DIMENSIONS(mm)

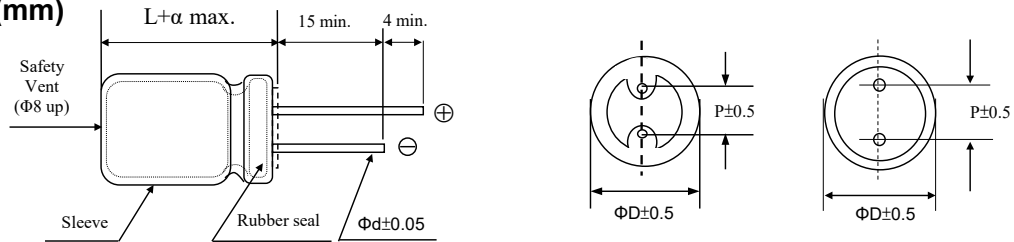

ΦD	8	10
P	3.5	5.0
Φd	0.5	0.6

α	(L < 20) 1.5
	(L ≥ 20) 2.0

STANDARD RATINGS

DxL(mm), R.C : (mA rms) at 105°C 100kHz , IMP:(Ω max) at 20°C,100kHz.

Cap (μF)	V Item	10			16			25		
		D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP
330								8x11.5	1420	0.072
390								8x15	2045	0.056
470					8x11.5	1420	0.072	10x12.5	2180	0.052
560								8x20	2385	0.040
680		8x11.5	1420	0.072	8x11.5	2045	0.056	10x16	2540	0.037
					10x12.5	2180	0.052			
820								10x20	2870	0.027
1000		8x15	2045	0.056	8x20	2385	0.040	10x25	3165	0.023
1000		10x12.5	2180	0.052	10x16	2540	0.037			
1200								10x35	3580	0.020
1500		8x20	2385	0.040	10x20	2870	0.027			
		10x16	2540	0.037						
1800		10x20	2870	0.027	10x25	3165	0.023			
2200		10x25	3165	0.023	10x35	3580	0.020			
2700		10x35	3580	0.020						

Cap (μF)	V Item	35			50		
		D x L	R.C.	IMP	D x L	R.C.	IMP
100					8x11.5	1090	0.095
120					8x15	1560	0.078
150					10x12.5	1620	0.087
180					8x20	1900	0.064
220		8x11.5	1420	0.072	10x16	1990	0.056
270		8x15	2045	0.056	10x20	2330	0.041
330		10x12.5	2180	0.052	10x25	2630	0.036
390		8x20	2385	0.040			
470		10x16	2540	0.037	10x35	2960	0.032
560		10x20	2870	0.027			
680		10x25	3165	0.023			
1000		10x35	3580	0.020			

XS