


# NK series

- On the basis of SD series ripple promotion product , 3,000 hours at 105°C.
- Suitable for LCD TV Power ,SMPS
- RoHS Compliance
- 高頻低阻抗,耐高紋波 , 105°C 3000小時壽命
- 適用於液晶顯示電源及開關電源等



## SPECIFICATIONS


Items 項目	Characteristics 特性			
Capacitance Tolerance 靜電容量誤差	± 20%(120Hz,20°C)			
Operating Temperature Range 適用溫度範圍	- 40 ~ +105°C			
Rated Voltage Range 額定電壓範圍	400VDC		450VDC~500VDC	
Leakage Current 洩漏電流	$I \leq 0.03CV + 20 (\mu A)$ ( After 5 minutes application of DC rated voltage, at 20 °C)			
Dissipation Factor 散逸因素( tan $\delta$ )	Measurement Frequency:120Hz. Temperature: 20°C			
	Rated Voltage(V)	400V	450V	500V
	tan $\delta$ (Max)	0.15	0.18	0.20
	When nominal capacitance over 1000 $\mu$ F, tan $\delta$ shall be added 0.02 to the listed value with increase of every 1000 $\mu$ F .			
Low Temperature Stability 低溫特性 Impedance Ratio(Max) 阻抗比率(最大值)	Measurement Frequency:120Hz			
	Rated Voltage(V)	400	450	500
	Z(-25°C)/Z(20°C)	5	6	6
	Z(-40°C)/Z(20°C)	10	12	12
Load Life 負荷壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 3,000 hours at 105°C.			
	Capacitance Change	Within ± 20% of Initial Value		
	tan $\delta$	200% or less of Initial Specified Value		
	Leakage Current	Initial Specified Value or less		
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000hours 105°C without voltage applied. Before the measurement. The capacitance shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.			
	Capacitance Change	Within ± 20% of Initial Value		
	tan $\delta$	200% or less of Initial Specified Value		
	Leakage Current	Initial Specified Value or less		
Standards 參照標準	IEC 60384-4(JIS C5101-4)			

## Frequency Coefficient of Permissible Ripple Current

Capacitance ( $\mu$ F)	Frequency (Hz)				
	50	120	1K	10K	100K
10~150	0.55	0.65	0.80	0.90	1.00

# NK series

**DIMENSIONS(mm)**

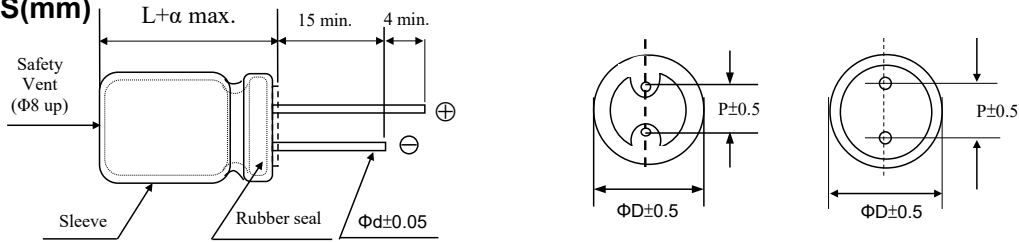

ΦD	6.3	8	10	12.5	16	18
P	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5	0.5	0.6	0.6	0.8	0.8

$\alpha$	(L < 20) 1.5
	(L ≥ 20) 2.0

**STANDARD RATINGS**

DxL(mm), R.C.(mA rms) at 105°C 100k Hz;IMP(Qmax)at 20°C 100kHz.

Cap (μF)	V	400			450			500			
		Item	D x L	IMP	R.C.	D x L	IMP	R.C.	D x L	IMP	R.C.
4.7			6.3x12	9.50	120	6.3x16	15.6	115	6.3x16	17.4	82
						8x10	15.6	115	8x10	17.4	82
6.8			6.3x13	8.30	130	10x10	12.7	130	10x10	15.2	90
8.2			6.3x15	7.50	175	8x12	9.20	165	10x11	11.1	115
10						8x15	8.10	195	10x13	9.80	150
			8x10	5.30	195	10x11	8.10	195			
12			8x13	4.10	235	10x13	6.30	230	10x14	7.50	210
15			8x15	3.90	265	10x13.5	6.00	255	10x15	7.20	225
18			8x17	3.10	300	10x15	5.70	300	10x17	6.50	245
22			10x14	3.00	315	10x17	5.40	315	12.5x17	5.60	315
			8x18	3.00	315						
27			10x15	3.00	375	10x20	4.50	375	10x23	5.30	350
33			10x18	2.50	445	10x35	3.10	445	12.5x20	4.10	405
47			12.5x19	1.90	620	10x45	2.60	620	16x20	3.10	565
68			16x20	1.40	1010	10x50	1.60	1010	18x20	2.20	815
82			18x20	1.00	1200	16x25	1.30	1200	18x25	1.90	980
100			18x25	0.900	1350	18x25	1.00	1250			